

I-BEAM ANCHOR


Removable anchor point for construction girders.

DESCRIPTION

360° swivel D-ring connection made of carbon steel.

Easy to use spring loaded paddles.

Devices slides freely over the beam thanks to reinforced steel brackets.

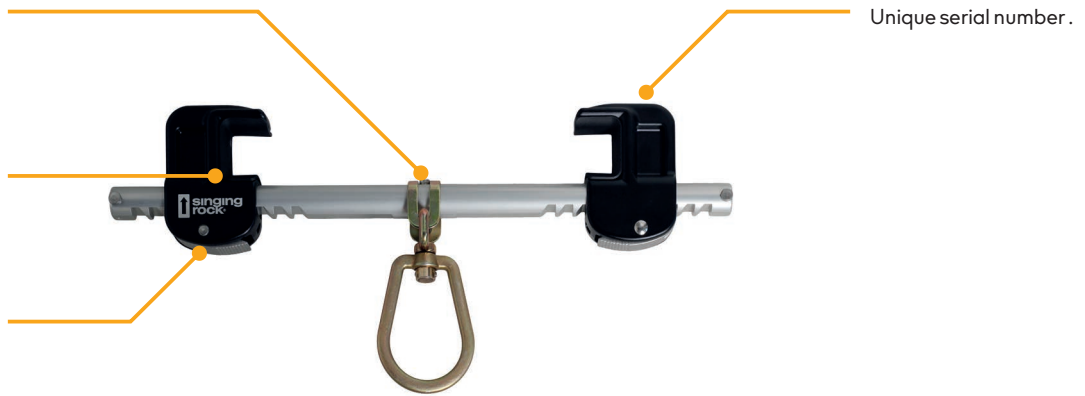

Unique serial number.

KEY FEATURES

- overhead or underfoot attachment
- can be used by two persons in rescue scenarios

STANDARDS

CE 0598

EN 795: 2012 / B
CEN/TS 16415:2013

FEATURES



105–310 mm



strength
22 kN



1.5 kg
53 oz



unique
number



3
YEARS
warranty

MATERIALS



- 95 % aluminum
- 5 % carbon steel

TECHNICAL DATA

