DYNEEMA SLING
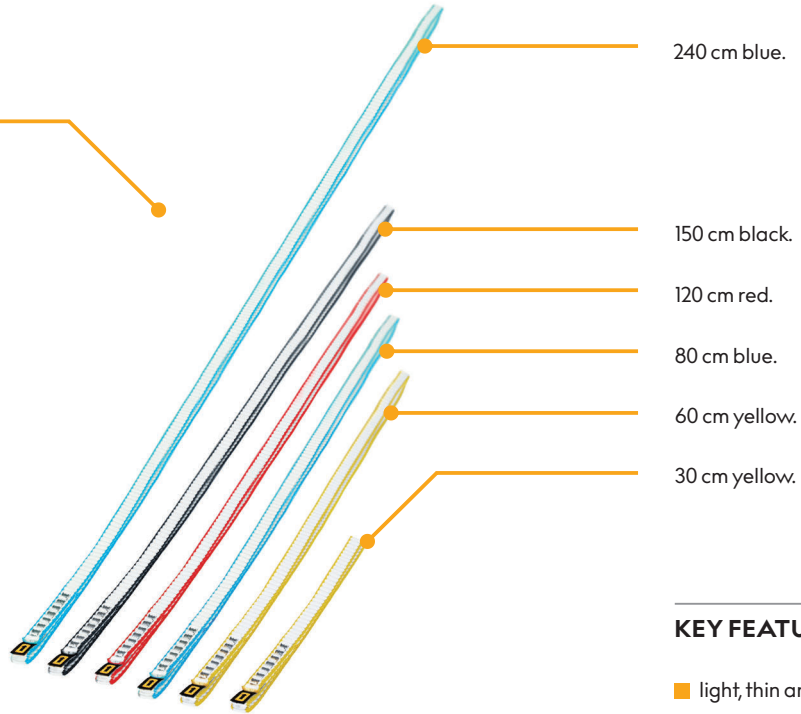## 11 mm

Sling for an anchor point.

DESCRIPTION

For better gear management available in different colors.

240 cm blue.

150 cm black.

120 cm red.

80 cm blue.

60 cm yellow.

30 cm yellow.

KEY FEATURES

- light, thin and still very strong
- ideal for all aplications where weight and strength come first

STANDARDS

CE 1019

EN 566

FEATURES

UIAA

UIAA	30–240 cm	strength 22 kN	27 g (60 cm)	unique number	3 YEARS warranty

MATERIALS

- **100 %** Dyneema®

TECHNICAL DATA

LENGTH DEVIATION

30; 60; 80 cm	+/- 2 cm
120; 150; 240 cm	+4/-2 cm

MBS = 22 kN
(**M**inimum **B**reaking **S**trength)

100 % MBS   ~200 % MBS   ~200 % MBS   ~50 % MBS

50 %	45°	50 kg
58%	60°	58 kg
71%	90°	71 kg
100%	120°	100 kg

(100 kg)   <60° = OK   >60° = !

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.

washing	drying	beware of salt	beware of UV	beware of chemicals	read instruction
30°C	30°C				

RELATED PRODUCTS

	DYNEEMA **sling 8 mm** C2004	**SLING** **16 mm** C2075
LENGTH	60/120 cm	30/60/80/120/150 cm
WIDTH	8 mm	16 mm
STRENGTH	22 kN	22 kN
WEIGHT	22 g (60 cm)	48 g (60 cm)

NOTES