JACOB PRO

Versatile and ultra light ladder intended for technical climbing and working at heights.

DESCRIPTION

Reinforced attachement loop for longer lifetime.

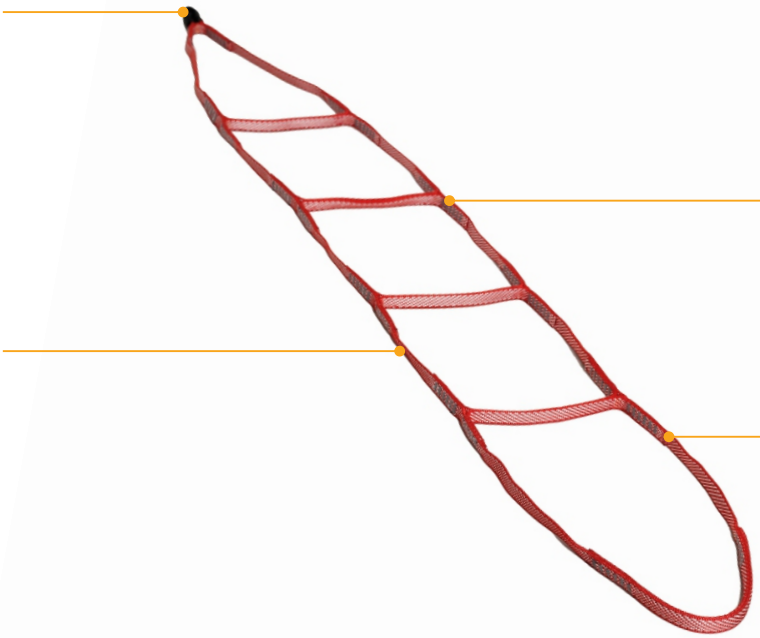

Strength of each loop 22 kN.

Each eye can be loaded in any direction, which can be useful not only in emergency situations.

The ladder is made of Dyneema® 13 mm.

KEY FEATURES

- may be also used as an open sling for anchoring

STANDARDS

CE 1019

EN 354

EN 566

FEATURES

- strength 22 kN
- length 140 cm
- 13 mm
- 155 g
- unique number
- 3 YEARS warranty

MATERIALS

- **50 %** Dyneema®
- **45 %** PAD
- **5 %** PES

TECHNICAL DATA

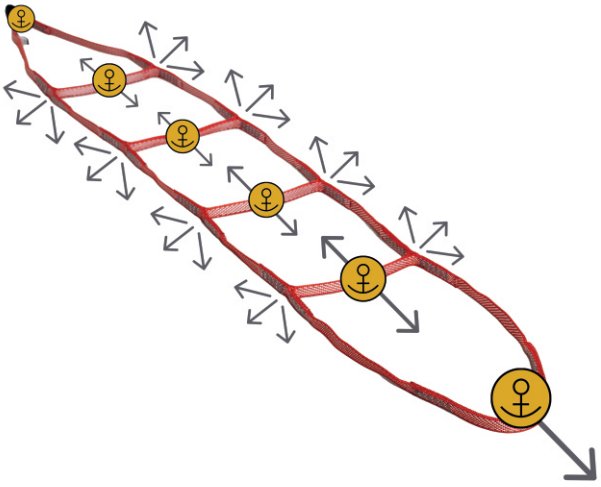

singing rock®

info@singingrock.cz

www.singingrock.com

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.
However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.

beware of salt | beware of UV | beware of chemicals | washing | drying | read instructions

RELATED PRODUCTS

JACOB
C2150BY

FOOTER XP
W1051BX

FOOTER II
W1024BX

	JACOB C2150BY	FOOTER XP W1051BX	FOOTER II W1024BX
LENGTH	150 cm	30–170 cm	40–140 cm
WEIGHT	210 g	90 g	115 g

NOTES

info@singingrock.cz
www.singingrock.com