

↑ STATIC 11

Low stretch kernmantle rope designed for general use for rope access, work positioning, rescue operations. Suitable also for caving, big wall, hauling and other vertical activities.

DESCRIPTION

Intended for manipulation with the objects, rescue and rope access methods for work at height.

Pack:
30–80, 100 m

Spool:
100, 200 m

COLORS

L0250WR white
L0250RR red
L0250BB black
(note: product code for rope on spool L0251*)



Stitched eye termination on request.

Ultrasonic ending.

KEY FEATURES

- stitched eye termination on request
- 3 color variants

STANDARDS

CE 1019
EN 1891

FEATURES



11 mm



34.5 kN




80 g/m




3 YEARS warranty

MATERIALS



● 100 % PAD

TECHNICAL DATA

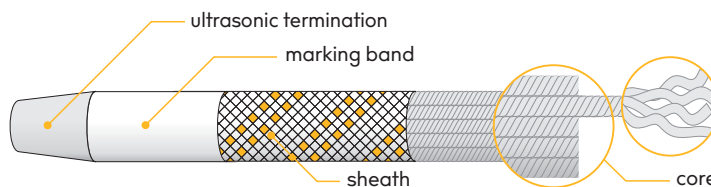

strength	= 34.5 kN
knot breaking force	= 22 kN
stitched eye breaking force	= 28.1 kN

