STATIC R44 NFPA 10.5

Excellent static rope for rescue and everyday work at height.

DESCRIPTION

Type A rope - low stretch kern-mantle rope designed for general use for rope access (including work positioning and restraint), rescue and caving. Intended for manipulation with the objects, rescue and rope access methods for work at height.

Meets the most demanding requirements of rescue specialists, firefighters, workers at height and all other professionals who require the highest quality in their daily operations.

Ulstrasonic ending.

Patented rope-braiding technology ROUTE 44.

Pack:
150, 200, 300 ft | 46, 61, 92 m

Coil:
330, 600, 660 ft | 100, 183, 200 m

COLORS

R0430KK	khaki
R0430WR	white
R0430RR	red
R0430BB	black

KEY FEATURES

- large diameter for longer lifetime
- ROUTE 44 technology
- 4 color variants

STANDARDS

CE 1019

NFPA 2500 (1983), 2022 edition

FEATURES

ROUTE 44

10.5 mm

32 kN

72 g/m

3 YEARS warranty

MATERIALS



100 % PAD

TECHNICAL DATA

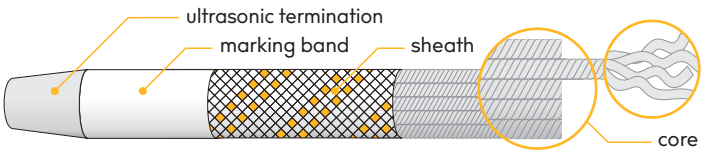

elongation at 1.35 kN (300 lbs)	= 3.5 %
elongation at 2.7 kN (600 lbs)	= 7.2 %
elongation at 4.4 kN (1000 lbs)	= 9.9 %

singing rock®

info@singingrock.com
www.singingrock.com

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.
However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.

beware of UV | beware of chemicals | beware of salt | washing | drying | read instructions

RELATED PRODUCTS

STATIC R44 NFPA 11
R0450

STATIC R44 NFPA 13
R0460WB

	STATIC R44 NFPA 11 (R0450)	STATIC R44 NFPA 13 (R0460WB)
DIAMETER	11 mm	13 mm
STRENGTH	33.5 kN	47 kN
WEIGHT	77 g/m	108.7 g/m
COLOR	orange white, red, black	white

NOTES