

↑ ANTISHOCK I

Full body harness for rope access, work positioning and fall arrest. The ANTISHOCK I antistatic harness is the perfect solution for work at height in explosive atmospheres. It is particularly suitable for energetics, petrochemical and mining environments.

DESCRIPTION

Name tag for easier recognition of the harness.

Front and back fall arrest attachment points according to EN361 meet American standards (ANSI, NFPA), marked with additional „A“ marking.

Front lower attachment point for descender placement or work positioning according to EN 813, EN 358.

Identification and methodical label.

2 side attachment points for work positioning according to EN 358.

2 large braided gear loops with a bearing capacity of 15 kg.

Buckles construction ensures longtime operation and efficiency (easy releasing and fastening even with dirty and tough webbing).



Shoulder attachment points for confined space rescue according to EN 1497.

Removable lanyard keepers.

Fall indicator (back side) is activated in case of a fall - red label indicates that the harness must be retired.

Chest ascender smart fixation system (using an additional maillon), works best with CAM CLEAN.

Double buckles made in accordance with strict American standards (ANSI, NFPA), their minimum strength is 17.8 kN.

KEY FEATURES


- fall indicator
- removable lanyard keepers
- all metal and alloy parts are overmolded with colored plastic with an electrical puncture resistance of 10 kV

STANDARDS

CE 1019

EN 358:2018
EN 361:2002
EN 813:2008
EN 1497:2007

ANSI Z359.11-2014
NFPA 2500 (1983), 2022 ED

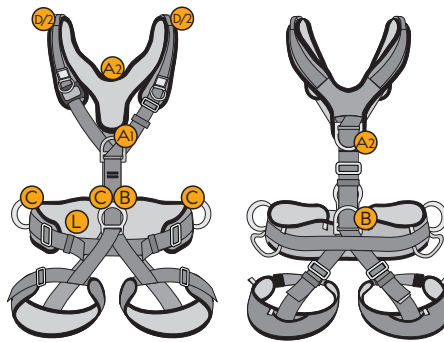

	NFPA class III life safety harness		EN standard	
A1	Head up	16 kN	Fall arrest attachment element	15 kN EN 361:2002
	Head down	10 kN		10 kN EN 361:2002
A2	Head up	16 kN	Fall arrest attachment element	15 kN EN 361:2002
	Head down	10 kN		10 kN EN 361:2002
B	Head up	16 kN	rappel/positioning attachment element	15 kN EN 813:2008
C	Head up	13 kN	positioning only attachment	15 kN EN 358:2018
D	Head up	16 kN	shoulder attachment element	15 kN EN 1497:2007

L label location
maximum rated load 150 kg

MATERIALS



- 43 % stainless steel
- 34 % PAD
- 13 % PES
- 5 % EVA foam
- 5 % polyethylene

FEATURES

M/L = 2 430 g
85.7 oz

150 kg

unique number

3 YEARS warranty

TECHNICAL DATA

SIZE	S	M/L	XL
A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
B [cm/in]	45-60 / 18-24	50-75 / 20-29	50-75 / 20-29
C [cm/ft]	150-170 / 4.92-5.57	160-180 / 5.25-5.9	175-205 / 5.74-6.73

