




EvaQ II

Descender and rescue device for height rescue from places like cable cars, outdoor parks, wind power plants, cranes or scyscrapers. Simple operation offers additional escape route for quick and efficient self-rescue of several persons using the shuttle system.

DESCRIPTION

Designed for working load 141kg (1 person).

Static polyamide kernmantle rope acc. to EN 1891-A, \varnothing 9.6 mm. Both ends are equipped with stitched eye and steel double trigger automatic locking connector with gate opening of 21mm.

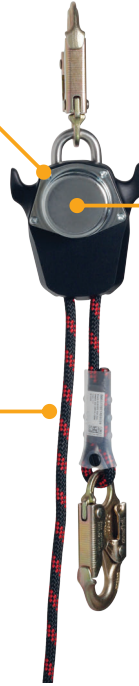

Automatic and redundant brake system. Brake drums are made from steel for high resistance.

KEY FEATURES

- max. working load: 141 kg
- max. descend/lifting height: 250 m
- descend speed: <math><2\text{m/sec}</math>
- operable temperature: $-40\text{ }^{\circ}\text{C}$ to $+65\text{ }^{\circ}\text{C}$

STANDARDS



ANSI Z359.4:2013

FEATURES



141 kg



max.
250 m



1.1 kg / 39 oz
(+ rope)



unique
number



warranty



only one
person

TECHNICAL DATA

