

ARBO SITE


Work positioning lanyard specially intended for tree care operations.

DESCRIPTION

Allows smooth length adjustment thanks to the use of friction knots (Prusik knot) and pulley.

Each component is replaceable in case of damage.

The set is delivered in two lengths and is ready to use.

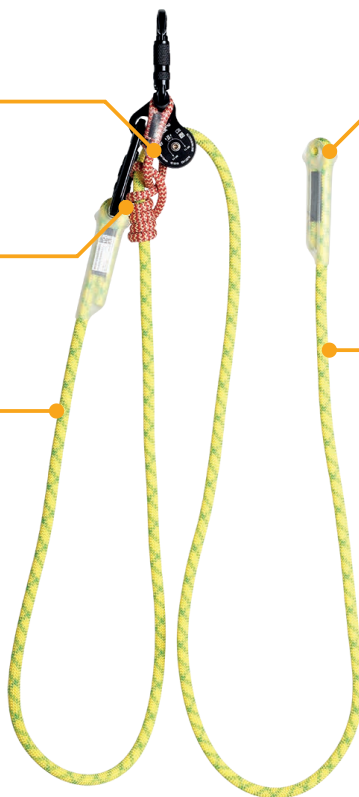

Two strength stitched eyes allow to create two independent work positioning lanyards.

Dynamic rope \varnothing 11 mm.

SET INCLUDES

- PATRON LANYARD (W2117)
- TIMBER ACCESSORY CORD (W2608)
- MIKY pulley (RK806BB00)
- 2x carabiner OXY/triple lock (K0122BB07)

KEY FEATURES

- it allows to create two independent work positioning lanyards

STANDARDS

CE 1019

This set is not certified according to EN 358, as it consists of removable components. However, it is generally recognized according to Arboricultural Organizations (ISAs) and working practices.

FEATURES



1 person only



3.5 m / 5.5 m
11.5 ft / 18 ft



345 g / 540 g



3 YEARS warranty

MATERIALS




- 61% PA
- 29.4% light alloy
- 7.8% PES (Technora)
- 1% stainless steel
- 0.6% PVC
- 0.2% brass

TECHNICAL DATA - PARTS OF THE SET



PATRON LANYARD
(W2117)
length 3.5 m / 5.5 m
 \varnothing 11 mm
weight 345 g / 540 g
EN 795B



TIMBER ACCESSORY CORD
(W2608)
length 75 cm
 \varnothing 8 mm
weight 55 g
EN 795B



PULLEY MIKY
(RK806BB00)
strength 28 kN
for ropes \varnothing max. 13 mm
weight 105 g
EN 12278



OXY / triple lock
(K0122BB07)
strength 26 kN
gate opening 21 mm
weight 81 g
EN 362, EN 12275

