



STORM 9.8


Single rope with great balance in weight, durability and use. Perfect choice for all-round climbing.

DESCRIPTION

The rope is very compact, durable and pleasant to use.

Middle marking.

Ultrasonic ending and thermo-transfer end marking.

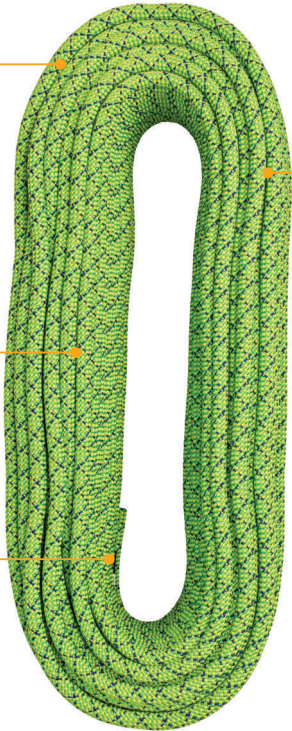

Narrow diameter and higher UIAA fall rating (UIAA falls 9) help you to improve your climbing achievements.

LENGTH
pack: 30–80; 100 m
spool: 200 m

KEY FEATURES

■ great handling, low-weight and high durability

STANDARDS

CE 1019
EN 892 UIAA

FEATURES



9.8 mm



single rope



3 YEARS
warranty



UIAA

MATERIALS



● 100 % PAD


TECHNICAL DATA

sheat slippage [%]	0.1
rope diameter [mm]	9.8
number of UIAA falls min	9
max. impact force [kN]	9.1
static elongation [%]	7.9
dynamic elongation [%]	35
weight [g/m]	65

Colour of the control yarn within rope's core – this colour marking applies only to SINGING ROCK ropes:

red/green	2013	blue/yellow	2020
red/black	2014	green/yellow	2021
green	2015	black/yellow	2022
blue	2016	red/blue	2023
yellow	2017	red/green	2024
black	2018	red/black	2025
red/yellow	2019	green	2026

Control yarn – blue/yellow = 2020



A coiled blue rope, likely a climbing rope, shown against a white background. The rope is thick and has a textured, braided appearance. It is coiled into a large, vertical loop.

STORM 9.8 DRY
L3044

WEIGHT	65 g/m
--------	--------

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use. However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



washing



drying



beware
of salt



beware
of UV



beware
of chemicals



read
instruction

NOTES